



Scissor Lift Trolleys (Single Scissor)

- These units help take the strain out of loading and unloading items from raised levels.
- The table is elevated by a pump action foot pedal and smoothly lowered by a hand operated release trigger.
- Foot operated hydraulic operation
- Lever release control
- Safety overload bypass valve
- Stepless rate of lowering regardless of load weight
- Durable powder coated finish
- Polyurethane castors 2 x fixed, 2 x swivel with brakes









| Code | Load Capacity (kg) | Castors (mm) | Table Size LxW (mm) | Lifting Range (mm) | Unit Weight (kg) |
|-------|-----------------------|-----------------|------------------------|-----------------------|------------------------|
| V2000 | 150 | 100 | 700x450 | 220-720 | 46 |
| V2001 | 300 | 125 | 850x500 | 340-880 | 77 |
| V2002 | 500 | 125 | 850x500 | 340-880 | 81 |
| V2003 | 750 | 125 | 1000x510 | 420-990 | 175 |

Scissor Lift Trolleys (Double Scissor)

- These units help take the strain out of loading and unloading items from raised levels.
- The table is elevated by a pump action foot pedal and smoothly lowered by a hand operated release trigger.
- Foot operated hydraulic operation
- Lever release control
- Safety overload bypass valve
- Stepless rate of lowering regardless of load weight
- Durable powder coated finish
- Polyurethane castors 2 x fixed, 2 x swivel with brakes







| Code | Load Capacity (kg) | Castors (mm) | Table Size (mm) | Lifting Range (mm) | Unit Weight (kg) |
|-------|-----------------------|-----------------|--------------------|-----------------------|---------------------|
| V2010 | 350 | 125 | 910x500 | 355-1300 | 105 |
| V2011 | 500 | 150 | 1010x520 | 435-1585 | 168 |
| V2012 | 700 | 125 | 1220x610 | 445-1500 | 195 |

Rough Terrain Scissor Lift Trolley

Rough terrain scissor lift trolley is ideal for outdoor applications Foot Pedal Cycles to Max Height: 25 Durable powder coated finish Rubber castors - 2 x fixed, 2 x swivel with brakes Min. Height of Table: 330mm Max Lift Height: 1000mm Overall Length: 1120mm Load Castors Table Lifting Unit Code Capacity (kg) Size (mm) Range (mm) Weight (kg) (mm) V2015 200 200 1000x500 340-1010 71 175 🌐 www.verdex.com.au VERDEX sales@verdex.com.au

Electric Scissor Lift Trolleys

- The battery electric scissor lift trolleys are available in both standard lift and high lift versions and 3 load capacities; 300kg, 500kg and 1000kg.
- · Smooth lifting of heavy loads with ease
- Automatic 12v charger
- Push button, battery/hydraulic operation
- Polyurethane castors 2 x fixed, 2 x swivel with brakes





| Code | Load Capacity (kg) | Castors (mm) | Table Size (mm) | Lifting Range (mm) | Unit Weight (kg) |
|-------|-----------------------|-----------------|--------------------|-----------------------|---------------------|
| V2060 | 300 | 125 | 850x500 | 290-880 | 115 |
| V2063 | 500 | 150 | 1010x520 | 495-1618 | 198 |
| V2064 | 1000 | 150 | 1200x800 | 430-1220 | 225 |

📞 Sydney: (02) 8865 1800 🛛 📞 Melbourne

Melbourne: (03) 9115 9100

C Brisbane: (07) 3558 9700



Extra Large Scissor Lift Trolleys

DELIVERING AUSTRALIA WIDE

- The extra large scissor lift trolleys are • excellent for handling large bulky items.
- The table is elevated by a pump action foot pedal ٠ and smoothly lowered by a hand operated release trigger.
- Foot operated hydraulic operation •
- Lever release control
- Safety overload bypass valve
- Positive braking system on rear wheels
- Durable powder coated finish •
- Stepless rate of lowering regardless of load weight
- Available in 500kg and 1000kg load capacities
- V2020: Polyurethane castors- 2 x fixed, 2 x swivel with brakes
- V2021: Nylon castors- 2 x fixed, 2 x swivel with brakes






| V2020 500 125 1600x810 290-915 154 V2021 1000 180 2035x750 360-1360 198 | Code | Load Capacity (kg) | Castors (mm) | Table Size (mm) | Lifting Range (mm) | Unit Weight (kg) |
|---|-------|-----------------------|-----------------|--------------------|-----------------------|---------------------|
| V2021 1000 180 2035v750 360-1360 108 | V2020 | 500 | 125 | 1600x810 | 290-915 | 154 |
| 1000 100 2033730 300 1300 190 | V2021 | 1000 | 180 | 2035x750 | 360-1360 | 198 |



www.verdex.com.au

Lifting & Handling Equipment

Visit www.verdex.com.au for more images and prices

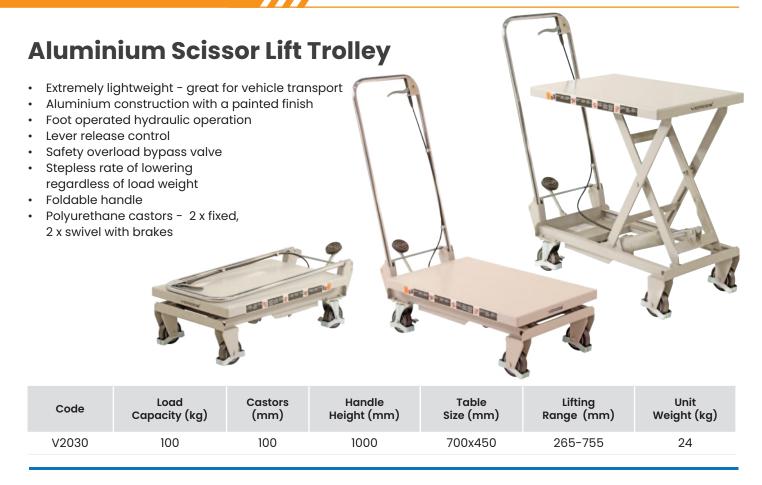

Stainless Steel Scissor Lift Trolleys

Sydney: (02) 8865 1800

These stainless steel scissor lift trolleys are great for use in food, pharmaceutical or hygiene areas.
Foot operated hydraulic operation
Lever release control
Stafety overload bypass valve
Stepless rate of lowering regardless of load weight
Scissor and pump unit is galvanised.
Stainless Steel Grade 304
Polyurethane castors - 2 x fixed, 2 x swivel with brakes

| Code | Load Capacity (kg) | Castors (mm) | Table Size (mm) | Handle Height (mm) | Lifting Range (mm) | Unit Weight (kg) |
|-------|-----------------------|-----------------|--------------------|-----------------------|-----------------------|---------------------|
| V2040 | 100 | 100 | 700x445 | 1000 | 250-1220 | 55 |
| V2041 | 350 | 100 | 830x500 | 1000 | 330-1295 | 78 |
| | | | | | | |

Galvanised Scissor Lift Trolley Galvanised version which is great . for food and medical areas Foot operated hydraulic operation Lever release control Double scissor lift version Safety overload bypass valve Stepless rate of lowering regardless of load weight Polyurethane castors - 2 x fixed, 2 x swivel with brakes Lifting Load Castors Table Unit Code Capacity (kg) (mm) Size (mm) Range (mm) Weight (kg) V2050 150 100 830x500 435-1430 80

Spring Scissor Lift Trolleys (With Centre Wheel Kit)

- Self-leveling, fully adjustable, weight sensitive
- Designed to maintain an ideal working height for assembly lines and loading / unloading operations
- Balance achieved by double springs fitted to the shock absorbers
- Simple to operate spring tension adjustment
- · Centre wheel kit is ideal for movement in small spaces
- Polyurethane castors 2 x fixed centre,
- 4 x swivel with brakes
- Centre Castors: 200mm





| Code | Details | Load Capacity (kg) | Swivel Castors (mm) | Table Size (mm) | Lifting Range (mm) | Unit Weight (kg) |
|-------|--------------------------------|-----------------------|---------------------------|--------------------|--------------------------|------------------------|
| V2075 | Scissor Lift Trolley | 300 | 100 | 830x500 | 360-770 | 65 |
| V2076 | Scissor Lift Trolley (X Large) | 300 | 100 | 1200x500 | 360-770 | 82 |





| 1 | Q | |
|---|---|--|

Sydney: (02) 886<u>5</u> 1800

Grisbane: (07) 3558 9700



Self Propelled Electric Scissor Lift Trolley (Double Scissor)

- Double Scissor lift is optimal for reaching high spaces with heavy loads
- 2 x rear swivel castors with brake
- 2 x pneumatic drive wheels
- Castors: 150mm
- Batteries: 2x12V 33Ah
- Curtis Controller: 70A
- Motor (Driving): 400W
- Motor (Lifting): 400W
- Lifting Time: 17 seconds
- Lifting Range: 460-1600mm
- Front Wheels: 275mm





| Code | Load Capacity (kg) | Table Size (mm) | Overall Size LxWxH (mm) | Unit Weight (kg) | Watch a video of this in operation on our website here: |
|-------|-----------------------|--------------------|----------------------------|---------------------|--|
| V2082 | 400 | 1100x600 | 1340x660x1100 | 234 | www.verdex.com.au/V2082 |

Self Propelled Electric Scissor Lift Trolley with Cage (Double Scissor)

- These self propelled lift tables take the effort of having to push heavy items manually as well as having electric operated lift.
- With the centre drive wheel it makes it extremely easy tomanoeuvre loads in narrow eisles or tight spaces.
- Comes complete with side cage as pictured which can be easily removed if not required
- Includes centre wheel unit
- 4 x swivel castors with brake
- 2 x pneumatic centre drive wheels
- Batteries: 2x12V 33Ah
- Curtis Controller: 70A
- Motor (Driving): 400W
- Motor (Lifting): 400W
- Lifting Time: 17 seconds
- Castors: 150mm
- Middle Wheels: 260mm
- Cage Height: 450mm



| Code | Load | Table Size | Lifting | Overall Size | Unit |
|-------|---------------|------------|------------|---------------|-------------|
| | Capacity (kg) | (mm) | Range (mm) | LxWxH (mm) | Weight (kg) |
| V2083 | 400 | 1000x600 | 450-1625 | 1340x600x1055 | 234 |



Super Low Profile Lift Tables

- These lift tables achieve a super low closed • height, eliminating the need for a pit installation
- The upper platform is fitted with a safety perimeter • to prevent descent on contact with obstructions
- 24v control unit with up/down buttons & emergency stop •
- Power supply is AC 415V/50HZ/3phase •
- The external power pack is equipped with a relief • valve against overloading and a compensated flow valve for controlling lowering speed
- Hose burst safety valve which stops the • table lifting incase of a hose breakage



1124





| Code | Load Capacity (kg) | Platform Size WxL (mm) | Lifting Range (mm) | Overall Size LxWxH (mm) | Unit Weight (kg) |
|-------|-----------------------|---------------------------|-----------------------|----------------------------|---------------------|
| V2122 | 1500 | 1200x1270 | 35-800 | 1850x1850x350 | 380 |
| | | | | | |

Sydney: (02) 8865 1800 **Melbourne:** (03) 9115 9100 **C** Brisbane: (07) 3558 9700

Low Profile Pallet Lift Tables

- Using pallet lift tables elevates pallets to the optimum lift height reducing the risk of repetitive strain injury and increasing productivity.
- Supplied with entry ramp to allow pallet truck entry •
- Can be supplied with optional rotator ring
- Tables are specially made for handling pallets, no need for a pit or load ramps
- Upper platform fitted with safety perimeter to prevent descent on contact with obstructions
- 24v control box with UP and DOWN buttons and emergency stop
- External power pack equipped with a relief valve ٠ against overloading and a compensating flow valve for controlling lowering speed
- Power Supply: 240v (3 phase 415v available if required)
- Hose burst safety valve to stop the lift table lowering in case of hose breakage
- Removable lifting eyes to facilitate handling and installation of the lift table
- Oil-less bushings on pivot points







Turntables available to suit - see page 178



Watch a video of this in operation on our website here: www.verdex.com.au/V2100

VERDEX



| | | | | | Constant of the |
|-------|-----------------------|---------------------------|-----------------------|-----------------|---------------------|
| Code | Load Capacity (kg) | Platform Size LxW (mm) | Lifting Range (mm) | Lifting Time | Unit Weight (kg) |
| V2100 | 1000 | 1450x1140 | 85-860 | 20 secs | 357 |
| V2101 | 2000 | 1600x1200 | 105-870 | 20 secs | 419 |




www.verdex.com.au

Electric Scissor Lift Tables

Lift tables can be applied in many work places to increase productivity and safety. Loads can be elevated or lowered to optimum heights at the push of a button.

- Heavy duty design and construction
- High quality European power packs
- Suitable for on floor applications or in floor pit applications
- Self lubricating bushings on pivot points
- Removable lifting eyes to facilitate installation
 and maintenance
- 240V power supply (3 phase available as an option)
- Upper platform fitted with aluminium safety bar preventing descent on contact with obstructions
- Low volt (24v) control box with up-down buttons.
- Internal power pack equipped with relief valve against overloading and compensated flow valve for controlled lowering speed
- Heavy duty cylinders with drainage system and check valve to stop the lift table lowering in case of hose burst
- Safety clearance between scissors to prevent trapping during operation.
- Push button pendant control with up, down and emergency stop

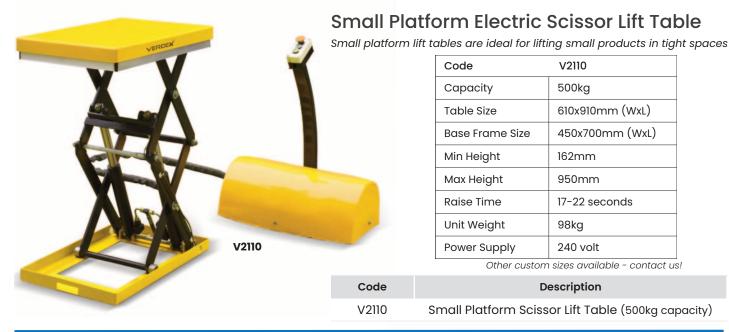

Single Scissor Electric Scissor Lift Tables

Single scissor lift tables for lifting various sized loads. These tables are ideal for applications where

| Code | V2150 | V2151 |
|-----------------|------------------|-------------------|
| Capacity | 2000kg | 2000kg |
| Table Size | 850x1300mm (WxL) | 1000x2000mm (WxL) |
| Base Frame Size | 785x1255mm (WxL) | 785x1630mm (WxL) |
| Min Height' | 230mm | 250mm |
| Max Height | 1000mm | 1300mm |
| Raise Time | 20-25 seconds | 25-30 seconds |
| Unit Weight | 235kg | 315kg |
| Power Supply | 240 volt | 240 volt |

Other custom sizes available - contact us!

| Code | Description |
|-------|------------------------------------|
| V2150 | Single Scissor Electric Lift Table |
| V2151 | Single Scissor Electric Lift Table |





184

Brisbane: (07) 3558 9700



Double Scissor Electric Lift Tables

| Code | V2165 | V2166 |
|-----------------|------------------|-------------------|
| Capacity | 2000kg | 4000kg |
| Table Size | 850x1300mm (WxL) | 1200x1720mm (WxL) |
| Base Frame Size | 785x1220mm (WxL) | 900x1600mm (WxL) |
| Min Height | 360mm | 400mm |
| Max Height | 1780mm | 2050mm |
| Raise Time | 35-45 seconds | 55-65 seconds |
| Unit Weight | 295kg | 520kg |
| Power Supply | 240 volt | 240 volt |

Other custom sizes available - contact us!

| Code | Description |
|-------|------------------------------------|
| V2165 | Double Scissor Electric Lift Table |
| V2166 | Double Scissor Electric Lift Table |



Extra Long Scissor Electric Lift Table

Extra long lift tables are perfect for oversized goods

| 4 |
|-------|
| Code |
| V2155 |

| Code | M2155-16 |
|--------------------------|--------------------|
| Capacity | 2000kg |
| Table Size | 820x2500mm (WxL) |
| Base Frame Size | 640x2460mm (WxL) |
| Min Height | 205mm |
| Max Height | 1000mm |
| Raise Time | 40-45 seconds |
| Unit Weight | 265kg |
| Power Supply | 3 Phase 415 volt |
| Other custom sizes avail | able - contact us! |

Description

Extra Long Electric Scissor Lift Table

High-Lift Electric Scissor Lift Tables

High lift scissor lift tables are ideal for moving goods up levels, including on construction sites and to mezzanines

| Code | V2161 | V2160 |
|-----------------|-------------------|-------------------|
| Capacity | 2000kg | 400kg |
| Table Size | 1000x1700mm (WxL) | 1200x1720mm (WxL) |
| Base Frame Size | 1010x1606mm (WxL) | 1000x1600mm (WxL) |
| Min Height | 560mm | 600mm |
| Max Height | 3000mm | 4140mm |
| Raise Time | 70 seconds | 30-40 seconds |
| Unit Weight | 750kg | 547kg |
| Power Supply | 240 volt | 240 volt |

Other custom sizes available - contact us!

| Code | Description |
|-------|---------------------------------------|
| V2161 | High Lift Electric Scissor Lift Table |
| V2160 | High Lift Electric Scissor Lift Table |
| | |

🔀 sales@verdex.com.au



Pneumatic Scissor Lift Table

- This pneumatic scissor lift table runs on air with no electrics or hydraulics used great for pharmaceutical and medical areas as its extremely clean and quite operation
- Safe, clean and extremely low maintenance
- Raise Time: 40-45 seconds
- Air Pressure 263 MPA



Optional Accessories for Scissor Lift Tables

As well as the following optional accessories, Verdex has the capability to manufacture custom solutions for your application. Give us a call on 1800 750 500 to discuss!

Sydney: (02) 8865 1800



Melbourne: (03) 9115 9100

Brisbane: (07) 3558 9700

Bishamon Pneumatic Rotating Pallet Positioner (For Varying Pallet Weights)

The most advanced pallet positioner available!

- EZ Loaders are designed to eliminate worker bending by automatically raising and lowering pallets during loading or unloading without the use of mechanical springs, motors or hydraulics.
- The new EZ loader can now handle a wide range of weight capacities from 110 kilos to 1800 kilos.
- The EZ Adjust knob a three position knob that allows adjustment of the collapsed capacity without changing the air pressure.
- EZ Loaders also allow easy pallet rotation for near-side loading so the worker does not have to reach or strain.
- As the load weight changes, the EZ Loader automatically adjusts, keeping the top of the load at a convenient working height.
- The patented pneumatic system found only on the EZ Loader has proven to be the choice of industry professionals worldwide.






EZ adjust knob provides up to 550kgs of capacity adjustment with the turn of a knob



Patented self-contained pneumatic system offers unsurpassed performance



Rollers are entrapped in the base frame and platform for added stability









| Code | Details | Load Capacity (kg) | Rotator Ring Dia. (mm) | Lifting Range (mm) | Base Frame Size (mm) | Unit Weight (kg) |
|-------|------------------|-----------------------|---------------------------|--------------------------|-------------------------|---------------------|
| V2175 | EZ Loader | 110-1800 | 1092 | 267-775 | 1245x617 | 172 |
| V2171 | Rotator Ring Bro | ike | | | | |
| V2172 | Bellows Skirting | to suit V2175 | | | | |



Spring Loaded Rotating Pallet Tables

- The pallet elevator keeps the active layer of the load at or above waist height, eliminating bending and lifting.
- This pallet elevator can be moved with a standard Pallet Truck
- It is proving highly effective at reducing the incidences of repetitive strain and back injury. ٠
- The construction of the pallet elevator is a scissor type action with • varying springs which can be adjusted for different heights
- Turntable allows operator to rotate the load with minimal stretching and reaching. .
- No ground fixing required, however the unit is fitted with brackets • to allow it to be secured to the ground if required
- Available in Galvanised or Powder Coated finishes
- Fork Pocket Centres: 615mm





V2134 (powder coated model)



(galvanised model)

PVC Protection screen supplied standard Rotating Tops (can be fixed if required)

Springs to suit a wide range of pallet weights

Easy spring changing lock mechanism

Fork pocket centres for easy relocation

Watch a video of this in operation on our website here: www.verdex.com.au/V2135



| Code | Details | Load Capacity (kg) | Table Diameter (mm) | Lifting Range (mm) | Fork Pocket Size (mm) | Unit Weight (kg) |
|-------|---------------|-----------------------|------------------------|-----------------------|--------------------------|---------------------|
| V2134 | Powder coated | 2000 | 1110 | 290-750 | 300x90 | 195 |
| V2135 | Galvanised | 2000 | 1110 | 290-750 | 300x90 | 195 |

Bolt on Brackets

📞 Sydney: (02) 8865 1800 🛛 📞 Melbourne: (03) 9115 9100 🛛 📞 Brisbane: (07) 3558 9700

Rotatable Electric Lift Table

- The pallet elevator is electric up and down via foot • pedal and manual rotating top
- It is ideal for varying weight pallets as there is no need to change springs
- Turntable allows the operator to rotate the load with ٠ minimal stretching and reaching while controlling the up/down operation via the foot pedal controls
- Can be easily moved around factory with a forklift •
- No ground fixing required
- Power: 240V



Foot Pedal to raise and lower platform

| Code | Load Capacity (kg) | Lifting Range (mm) | Table Diameter (mm) | Base Frame Size LxW (mm) | Unit Weight (kg) |
|-------|--------------------------|--------------------------|---------------------------|-----------------------------|------------------------|
| V2125 | 2000 | 300-710 | 1110 | 935x915 | 175 |


Powered Rotatable Electric Lift Table

- · The pallet elevator is electric up, down and rotating top via pendant control
- · It is ideal for varying weight pallets as there is no need to change springs
- · Powered Rotation in both directions which can be set to rotate continuously.
- · Can be easily moved around factory with a forklift
- No ground fixing required
- Power: 240V





sales@verdex.com.au



VERDEX



| Code | Load Capacity (kg) | Lifting Range (mm) | Table Diameter (mm) | Base Frame Size LxW (mm) | Unit Weight (kg) |
|-------|-----------------------|-----------------------|------------------------|-----------------------------|---------------------|
| V2126 | 2000 | 340-710 | 1110 | 935x915 | 190 |
| | | | verdex com qu | VEDDE | 189 |

(III) www.verdex.com.au



| Description | Capacity (kg) | Unit Weight (kg) |
|--|---|--|
| Heavy Duty Pallet Stand with Short Adjustable Legs | 2000 | 40 |
| Heavy Duty Pallet Stand with Tall Adjustable Legs | 2000 | 43 |
| Gussets to suit V7908 & V7909 | | 7.5 |
| Steel Cap to suit V7908 & V7909 | | 24.5 |
| Castor Kit to suit V7908 & V7909 | 2000 | 11 |
| Handle to suit V7908 & V7909 | | 4.65 |
| Tow Hitch Kit to suit V7908 & V7909 | 4500 | 7 |
| | Heavy Duty Pallet Stand with Short Adjustable Legs Heavy Duty Pallet Stand with Tall Adjustable Legs Gussets to suit V7908 & V7909 Steel Cap to suit V7908 & V7909 Castor Kit to suit V7908 & V7909 Handle to suit V7908 & V7909 | Description(kg)Heavy Duty Pallet Stand with Short Adjustable Legs2000Heavy Duty Pallet Stand with Tall Adjustable Legs2000Gussets to suit V7908 & V79092000Steel Cap to suit V7908 & V79092000Castor Kit to suit V7908 & V79092000Handle to suit V7908 & V79092000 |

Melbourne: (03) 9115 9100



Heavy Duty Pallet Stand (with Adjustable legs & Turntable)

- The Heavy Duty Pallet Stand with Turntable is designed to rotate pallets, allowing for easier access to goods and materials on your pallet.
- · Designed to prevent the operator from unecessary strain when operating
- Steel Construction with a powdercoated finish
- V7912 Height: 275-425mm
- V7913 Height: 525-675mm
- Platform Size: 1250x1250mm
- Optional 100mm Castor Kit: 2 x Fixed, 2 x Swivel with brakes (Adds 160mm Height)







| Code | Description | Capacity (kg) | Unit Weight (kg) |
|-------|---|---------------|------------------|
| V7912 | Pallet Stand with Short Adjustable legs & Turntable | 2000 | 160 |
| V7913 | Pallet Stand with Tall Adjustable legs & Turntable | 2000 | 163 |
| V7904 | Steel Cap to suit V7912 & V7913 | | 24.5 |
| V7905 | Castor Kit to suit V7912 & V7913 | 2000 | 11 |




Battery Electric Work Positioner

- A range of highly manoeuvrable, lightweight lifts, designed to take the strain out of any lifting job from ground level to over shoulder height
- Ideal for use in narrow aisles and confined spaces. Perfect for all applications from pharmaceutical to catering, from packing line to food processing
- Automatic electric overload protection system ensures safe operation
- Quick change attachment options available
- EN1757 compliant. CE marked
- Battery electric with built in charger that you can plug in anywhere

Pendant controller on flexi cord

- Load Centre: 235mm
- 24v, 7.2Ah battery
- 75mm fixed rubber castors on front
- 125mm swivel rubber castors with brakes on rear
- Leg Height: 105mm









| Code | Details | Load Capacity (kg) | Platform/ Attachment Size (mm) | Lifting Range (mm) | Overall Size LxWxH (mm) | Unit Weight (kg) |
|--|------------------------|-----------------------|--------------------------------------|--------------------------|----------------------------|---------------------|
| V2200 | Work Positioner | 100 | 470x660 | 130-1700 | 890x600x1990 | 62 |
| V2201 | Work Positioner | 150 | 470x660 | 130-1500 | 890x600x1790 | 65 |
| V2202 | V Block Attachment - | 400x400x80mn | n | | | |
| V2203 | Roll Prong Attachmen | t - 600x50mm | | | | |
| V2204 Double Prong Attachment - 450x50mm (200mm between) | | | | | | |
| V2205 | Reel Handler Rotator A | Attachment - 43 | 30x90mm | | | |

192

Stainless Steel Battery Electric Work Positioner

- These stainless steel lifters are ideal for the food and pharmaceutical industries where hose down is required.
- Automatic electric overload protection system ensures safe operation.
- EN1757 compliant. CE marked
- Battery electric with built in charger that you can plug in anywhere
- Battery: 24V, 12.0Ah
- Power: 24V, 200W
- Compatible with attachments pictured on previous page
- Load Centre: 235mm
- 75mm fixed rubber castors on front
- 125mm swivel rubber castors with brakes on rear
- Leg Height: 115mmS/S Grade: 304










castors with rear brakes



| Code | Load Capacity (kg) | Platform/ Attachment Size(mm) | Lifting Range (mm) | Overall Size LxWxH (mm) | Unit Weight (kg) |
|-------|-----------------------|-------------------------------------|-----------------------|----------------------------|---------------------|
| V2210 | 100 | 470x600 | 150-1760 | 890x600x1990 | 63 |
| V2211 | 150 | 470x600 | 130-1560 | 890x600x1790 | 66 |



www.verdex.com.au

Battery Electric Platform Work Positioners

- A range of highly manoeuvrable, lightweight lifts, designed to take the strain out of any lifting job from ground level to over shoulder height
- Ideal for use in narrow aisles and confined spaces.
- Perfect for all applications from pharmaceutical to catering, from packing line to food processing
- Automatic electric overload protection system
 ensures safe operation
- Load Centre: 237mm
- Platform/ Attachment Size: 475x605mm
- Lifting/Lowering Speed: 55mm/s
- Steering Wheel: 100mm
- Battery: 12x2-10Ah
- Charger: DC-24V-2A



| Code | Load Capacity (kg) | Lifting Range (mm) | Overall Size LxWxH (mm) | Unit Weight (kg) |
|-------|-----------------------|-----------------------|----------------------------|---------------------|
| V2190 | 100 | 130-1700 | 920x505x2160 | 65 |
| V2191 | 150 | 130-1500 | 920x505x1950 | 65 |



Trailer Stabilising Jack Stand

DELIVERING AUSTRALIA WIDE

- The Trailer Stabilising Jack is a heavy-duty support system designed to provide unrivalled stability and safety for trailers with a capacity of up to 45 tonnes.
- Engineered for maximum strength and durability, this jack is perfect for use in a wide range of industrial and commercial applications, such as loading docks, warehouses, and transportation hubs
- Top Diameter: 200mm
- 200mm Rubber Wheel







| Code | Lifting | Static | Lifting Range | Overall Size | Unit |
|-------|---------------|---------------|---------------|--------------|-------------|
| | Capacity (kg) | Capacity (kg) | (mm) | LxWxH (mm) | Weight (kg) |
| V2451 | 18,000 | 45,000 | 1000-1300 | 574x445x1300 | 40 |

10 Tonne Hydraulic Jack



Compact Ride-On Electric Materials Handling Tug

The Compact ride-on compact electric tug is the ultimate manual handling solution designed for good's transport for trolleys and anything that is difficult to push or pull around in the hospital, aged care and industrial warehouse environments.

The Materials Handling Electric Towing Tug is a ride-on unit that doesn't compromise its small size for a ride. Its compact size allows it to be effective in confined spaces, whilst being able to turn on its self. With a very low centre of gravity, the risk of tipping is greatly reduced. Its two front steer wheels create exceptional stability across many rough surfaces.

- Motor Voltage: 24 Volts
- Range: 30-60km




Watch a video of this in operationon our website here: www.verdex.com.au/V1505







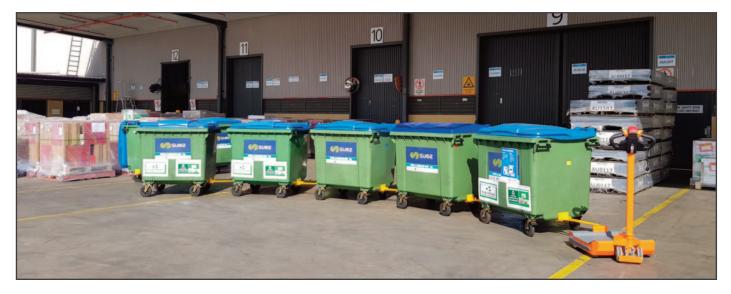

Push Pull Wheel Base **Unit Weight Overall Size** Code Capacity (kg) Capacity (kg) LxWxH (mm) (mm) (kg) 1200 1500 790x660x1340 620 115 V1505 196 **Sydney:** (02) 8865 1800 Melbourne: (03) 9115 9100 **C** Brisbane: (07) 3558 9700

1000kg Smart Tow Tug

Great for moving dolleys, trolleys and roll cages throughout the warehouse, workshop or shopping centres etc. Compact design which makes it extremely manoeverable and easy to transport in vehicles.

- Travel Speed: up to 6km/h
- Programmable speed controller
- Battery: 24v, 18Ah & DC 24v, 300w
- Motor: DC 24v, 300w
- Rear Wheels Solid: 250mm
- Front Wheels Poly: 75mm
- Handle Height: 750-1050mm (adjustable)
- Turning Radius: 475mm



Attachments pictured are supplied as standard with the Tow Tug



Watch a video of this in operationon our website here: www.verdex.com.au/V1500






| Code | Traction Capacity (kg) | Width (mm) | Overall Size LxH (mm) | Unit Weight (kg) |
|-------|---------------------------|---------------|--------------------------|---------------------|
| V1500 | 1000 | 465 | 810x490 | 65 |
| | | | | |



Manual Fork/Platform Stacker

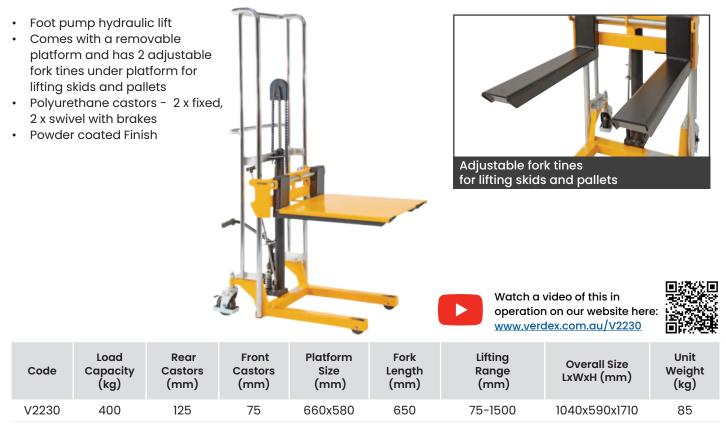

Electric Fork/Platform Stacker

• Electric hydraulic lift

- Battery: 12v 80Ah
- Comes with a removable platform
- 2 adjustable fork tines under platform for lifting skids and pallets
- Polyurethane castors 2 x fixed, 2 x swivel with brakes
- Load Capacity: 400kg
- Rear Castors: 125mm
- Front Castors: 75mm



Watch a video of this in operation on our website here:

www.verdex.com.au/V2231

Adjustable fork tines for lifting skids and pallets



| Code | Details | Platform Size (mm) | Fork Length (mm) | Lifting Range (mm) | Overall Size LxWxH (mm) | Unit Weight (kg) |
|--------|----------------------------------|-----------------------|---------------------|-----------------------|----------------------------|---------------------|
| V2231 | Electric Stacker | 660x580 | 650 | 80-1500 | 1040x590x1710 | 120 |
| V2231S | Stainelss Steel Electric Stacker | 660x580 | 650 | 80-1500 | 1040x590x1710 | 120 |

198

Sydney: (02) 8865 1800

Melbourne: (03) 9115 9100

Aluminium Hand Stacker

- These aluminium lifters are great for assisting in the lifting, positioning and installation of goods up to 2500mm in height
- Manual hand winch control with automatic braking action
- Foot pedal brake
- Fits through standard doorways
- Quick set up requires no tools
- Legs are straddle with quick adjustment
- Internal Adjustable Leg Dimensions: 570-940mm
- External Adjustable Leg Dimensions: 750-1120mm





| Code | Load Capacity (kg) | Rear Castors (mm) | Front Castors (mm) | Platform Length (mm) | Load Centre (mm) | Lifting Range (mm) | Overall Size LxWxH (mm) | Unit Weight (kg) |
|-------|--------------------------|-------------------------|--------------------------|-------------------------|------------------------|--------------------------|----------------------------|------------------------|
| V2250 | 180 | 200 | 50 | 570 | 254 | 50-2500 | 1100x736x1700 | 66 |

Aluminium Lift Assist Device

- These aluminium lifters are great for assisting in the lifting, positioning and installation of goods at height.
- Ideal for lifting items into ceiling spaces or handling machine parts at height.
- Folds for easy storage and transport.
- Manual hand winch control with automatic braking action
- Fits through standard doorways.
- Quick set up requires no tools.
- Legs fold up for easy storage.
- Arm Length: 800mm
- Load Capacity at a 400mm load centre: 350kg
- Load Capacity at a 1000mm load centre: 150kg



Watch a video of this in operation on our website here: <u>www.verdex.com.au/V2241</u>



| Arm | Ground | Operating | Front | Rear |
|-------------|----------------|-------------|--------------|--------------|
| Length (mm) | Clearance (mm) | Length (mm) | Castors (mm) | Castors (mm) |
| 800 | 50 | 1880 | 100 | 125 |
| Code | Min. | Max | Folded Size | Unit |
| | Height (mm) | Height (mm) | LxWxH (mm) | Weight (kg) |
| V2241 | 150 | 5000 | 870x730x2000 | 145 |

199

au 💮 www.verdex.com.au

120KG Fork/Platform Trolley

- Robust, light weight steel construction platform lift trolley which is ideal for lifting heavy items to a work bench level for working on
- The platform is removable and has 2 fork tines which are adjustable under platform for lifting small skids








| Code | Load Capacity (kg) | Rear Castors (mm) | Front Castors (mm) | Platform Size (mm) | Fork Size (mm) | Lifting Range (mm) | Overall Size LxWxH (mm) | Unit Weight (kg) |
|-------|--------------------------|-------------------------|--------------------------|--------------------------|----------------------|--------------------------|----------------------------|------------------------|
| V2255 | 120 | 200 | 50 | 500x420 | 50x420 | 95-1050 | 700x460x137 | 39 |

Platform and Fork Lift Trolley

- The ideal trolley for lifting loads up to 150kg with ease
- Complies to relevant Australian Standards
- Swappable accessories for handling of different loads
- Forks for lifting small pallets and skids
- Platform for general lifting
- Patented silent winch which locks the load at any height
- Steel cable which runs inside the mast to prevent pinching
- Puncture proof rear wheels
- Made from aluminium
- Load Capacity (with forks): 150kg
- Load Capacity (with platform only): 120kg
- Platform Dimensions (DxW): 360x420mm
- Fork Dimensions (WxL) : 50x460mm







| Code | Details | Lift Height (mm) | Folded Size LxWxH (mm) | Overall Size LxWxH (mm) | Unit Weight (kg) |
|-------|------------------------|---------------------|---------------------------|----------------------------|------------------------|
| V2265 | Platform Lift Trolley | 1030 | 300x500x1320 | 710x530x1320 | 27 |
| V2266 | Fork Kit to suit V2265 | | | | |

200

📞 Sydney: (02) 8865 1800 🛛 📞 Melbourne: (03) 9115 9100 👘

Brisbane: (07) 3558 9700

Heavy Duty Manual Fork Stackers

- These manual fork stackers are a • very heavy duty construction and are an economical alternative to forklifts
- Manual hydraulic lift via pallet truck style • handle or foot pedal
- Straddle leg model for use with • standard 1170mm Australian pallets
- Standard leg model for use on Euro pallets and small skids
- Lockable rear wheels are . standard on all models
- Front Castors: 80mm
- Rear Castors: 150mm







Foot pedal pump



Watch a video of this in operationon our website here: www.verdex.com.au/V2280

Standard Legs




Lifting Load Unit **Overall Width Overall Size** Details Capacity Range Weight Code of Tines (mm) LxWxH (mm) (kg) (mm) (kg) V2280 Standard Leg Fork Stacker 500 90-1600 200-745 1640x805x2000 160 V2281 Straddle Leg Fork Stacker 500 70-1600 200-950 1600x1500x2000 225 V2282 Standard Leg Fork Stacker 1000 90-1600 200-700 1640x1000x2085 250 V2283 1000 70-1600 200-950 1560x1450x2050 295 Straddle Leg Fork Stacker



Pallet Turntable Disc

- The Pallet Turntable Disc is designed specifically so that pallets can be placed on or removed from the turntable using only a hand pallet truck
- Lifting lug screws into the centre of the disc and makes transportation of the unit easy.
- Disc Diameter: 1105mm

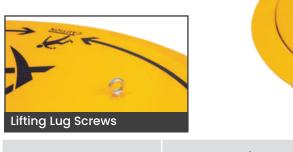



| Code | Load | Overall Size | Unit |
|-------|---------------|--------------|-------------|
| | Capacity (kg) | HxD (mm) | Weight (kg) |
| V2145 | 2000 | 25x1235 | 120 |

Pallet Rotator Ring

- The rotator ring is popular due to its light weight and easy maneuverability.
- It can be moved easily by one person.16 roller bearings to ensure smooth
- rolling for heavy loads







| Code | Load Capacity (kg) | Overall Size WxH (mm) | Unit Weight (kg) | | |
|-------|-----------------------|--------------------------|---------------------|--|--|
| V2140 | 1000 | 1000x65 | 36 | | |
| | | | | | |

202

Brisbane: (07) 3558 9700



Capacity up to 1500kg and

ability to overcome ramps up to 4/16% (loaded/un

suitable for work in loading

loaded) makes the truck

docks and on delivery operations in different

conditions

The Edge - Electric Pallet Truck

- The economical option for an electric pallet truck - avoid the strain of manually pushing a pallet standard pallet truck.
- Capacity up to 1500 kg and ability to overcome • ramps up to 4/16% (loaded/unloaded) makes the truck suitable for work in loading docks and on delivery operations in different conditions
- The battery for this unit has a 3-6 hour battery life. •
- Load Capacity: 1500kgs
- Min Fork Height: 85mm
- Lowered Height: 80mm
- Wheel Type: Polyurethane
- Travel Speed (unloaded): 5.8km/h
- **Electric Brake**
- Battery: 24V 20Ah
- **Brushless AC motor**
- Emergency stop button







VERDEX

www.verdex.com.au/V2388

2500KG Industrial Pallet Trucks



| Code | Details | Load Capacity (kg) | Tine Size (mm) | Fork Length (mm) | Width (mm) | Overall Length (mm) | Lifting Range (mm) | Unit Weight (kg) |
|-------|--------------------------------------|--------------------------|-------------------|------------------------|---------------|---------------------------|--------------------------|------------------------|
| V2322 | Standard Size - Poly Wheels | 2500 | 50x160 | 1150 | 685 | 1550 | 85-190 | 70 |
| V2323 | Standard Size - Nylon Wheels | 2500 | 50x160 | 1150 | 685 | 1550 | 85-190 | 67 |
| V2326 | Euro Size Pallet Truck - Poly Wheels | 2500 | 50x160 | 1150 | 520 | 1550 | 85-190 | 60 |
| V2325 | Small Skid Size - Poly Wheels | 2500 | 50x160 | 1150 | 450 | 1550 | 85-190 | 66 |

Low Profile Pallet Truck

- Easy access into low skids and pallets.
- Great for unloading containers with low import type pallets with a low clearance of only 51mm.
- Powder coated safety yellow
- Steering Wheel Size: 50x180mm
- Comes standard with nylon wheels, however polyurethane available on request
- Tine Size (HxW): 470x160mm
- Min Fork Height: 51mm



| Code | Details | Load Capacity (kg) | Fork Length (mm) | Width (mm) | Overall Length (mm) | Unit Weight (kg) |
|-------|--|--------------------------|------------------------|---------------|---------------------------|------------------------|
| V2330 | Low Profile Pallet Truck - Nylon Wheels | 1500 | 1120 | 685 | 1550 | 80 |
| V2329 | Low Profile Pallet Truck - Polyurethane Wheels | 1500 | 1120 | 685 | 1550 | 80 |

V2329

204

📞 Sydney: (02) 8865 1800 🛛 📞 Melbourne: (03) 9115 9100 👘

Brisbane: (07) 3558 9700

V2330



Extra Long 2000KG Pallet Trucks



V2347

Extra Long Pallet Truck

Extra Long Pallet Truck

60x160

2500

685

2000

85

285

Lifting & Handling Equipment



Stainless Steel Pallet Trucks

- Ideal for the food, chemical and pharmaceutical industry or where corrosive acids are used.
- The front wheels are fully enclosed which is required for clean rooms and food environments.
- Grade of Stainless: 316
- Tine Size: 60x160mm
- Steering Wheel Size: 50x200mm
- Nylon wheels



Watch a video of this in operation on our website here: www.verdex.com.au/V2340






| Code | Details | Load Capacity (kg) | Length (mm) | Width (mm) | Min. Fork Height (mm) | Unit Weight (kg) |
|-------|--|-----------------------|----------------|---------------|--------------------------|---------------------|
| V2340 | Stainless Steel Pallet Truck (Standard Size) | 2000 | 1150 | 685 | 85 | 75 |
| V2341 | Stainless Steel Pallet Truck (Euro Size) | 2000 | 1150 | 520 | 85 | 72 |

206

Sydney: (02) 8865 1800

Melbourne: (03) 9115 9100

Brisbane: (07) 3558 9700

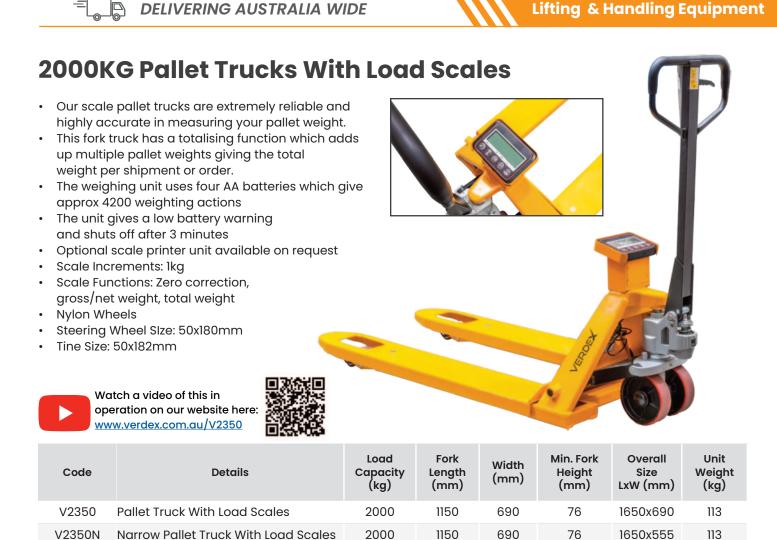



Load **Tine Size** Length Width Min. Fork Unit Code Capacity (kg) (mm) (mm) (mm) Height (mm) Weight (kg) V2355 2000 50x182 1150 690 85 138





Rough Terrain Pallet Truck

This rough terrain pallet truck is great for applications such as timber yards, brick

- yards and hard stand areas where the ground is gravel or rough.
- Large pneumatic wheels
- Adjustable Fork Width: 228-735mm
- Width Inside Front Wheels: 1230mm
- Front Wheel Size: 550x132mm (Dia x Width)
- Rear Wheel Size: 265x80mm (Dia x Width)
- Turning Radius: 1500mm
- Axle Distance between Front and Rear Wheels: 973mm



| Code | Load Capacity (kg) | Load Centre (mm) | Tine Size (mm) | Fork Length (mm) | Lifting Range (mm) | Overall Size LxWxH (mm) | Unit Weight (kg) |
|-------|--------------------------|------------------------|-------------------|---------------------|-----------------------|----------------------------|------------------------|
| V2360 | 1200 | 450 | 100x50 | 860 | 63-233 | 1375x1605x1200 | 245 |

208

Sydney: (02) 8865 1800

Melbourne: (03) 9115 9100

Brisbane: (07) 3558 9700

Manual Hi-Lift Pallet Trucks

- Great for lifting skids and pallets with no bottom rail •
- Extremely easy to pump and light weight
- Quick-lift as standard with automatic transfer • to normal lifting loads over 150kg
- Automatic descending speed ٠ control, regardless of load
- · Front support legs and adjustable stabilisers ensure maximum stability
- Heavy duty design •
- Conforms to EN 1757-4
- Not suitable for closed pallets with a b •

Stainless Steel option is available as a s


| bottom rail special order | |
|------------------------------|--|
| | |

| Code | Load Capacity (kg) | Length (mm) | Width (mm) | Lifting Range (mm) | Tine Size (mm) | Lifting Range (mm) | Unit Weight (kg) |
|-------|-----------------------|----------------|---------------|-----------------------|-------------------|-----------------------|---------------------|
| V2371 | 1000 | 1100 | 520 | 85-800 | 50x160 | 85-800 | 118 |
| V2370 | 1000 | 1150 | 680 | 85-800 | 50x160 | 85-800 | 125 |

Electric Hi-Lift Pallet Trucks

- Great for lifting skids and pallets with no bottom rail .
- Quick-lift as standard with automatic transfer to normal lifting loads over 150kg
- Automatic descending speed ٠ control, regardless of load
- Front support legs and adjustable ٠ stabilisers ensure maximum stability
- Heavy duty design
- Conforms to EN 1757-4
- Not suitable for closed pallets with a bottom rail
- Battery: 12v, 54Ah

Stainless Steel option is available as a special order

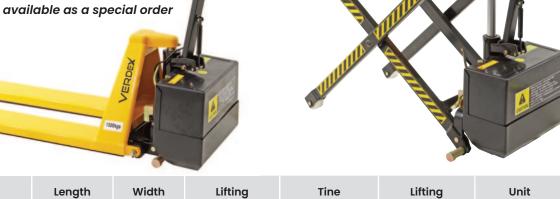

| Code | Load Capacity (kg) | Length (mm) | Width (mm) | Lifting Range (mm) | Tine Size (mm) | Lifting Range (mm) | Unit Weight (kg) |
|-------|-----------------------|----------------|---------------|-----------------------|-------------------|-----------------------|---------------------|
| V2373 | 1500 | 1100 | 520 | 85-800 | 50x160 | 85-800 | 150 |
| V2372 | 1500 | 1150 | 680 | 85-800 | 50x160 | 85-800 | 160 |



Fork Extension Slippers / Tines (Galvanised)

- Fork slippers extend the versatility of your lift truck
- The safe working load (SWL) is measured per pair at 600mm load centre
- Slippers conform to relevant Australian Standards
- Designed and manufactured in accordance with AS2359.15 and other relevant Australian standard which requires the slippers used for general usage to be not longer than 167% of the supporting tine's length.





| Code | *SWL (kg) | Length (mm) | Internal Tine Size (mm) | External Tine Size (mm) | HCG (mm) | Weight Per Pair (kg) |
|-------|--------------|----------------|----------------------------|----------------------------|-------------|-------------------------|
| V2405 | *4500 | 1780 | 138x55 | 150x67 | 845 | 66 |
| V2406 | *4500 | 2400 | 138x55 | 150x67 | 1154 | 88 |
| V2407 | *8500 | 1800 | 170x76 | 185x92 | 830 | 133 |
| V2408 | *8500 | 2400 | 170x76 | 185x92 | 1154 | 177 |
| V2409 | *8500 | 3000 | 170x76 | 185x92 | 1454 | 221 |

*SWL shown here is the maximum however it varies depending on forklift capacity - Refer to load capacity plate on your forklift

Slip-On Roll Forklift Prong

Sydney: (02) 8865 1800

Slip-on Roll Prong suitable for fabric, cable, carpet and coil products. These attachments quickly adapt to almost any forklift and require only the connection of a safety chain to prevent unintentional disengagement.

- Prongs are manufactured from solid steel
- Finish: Zinc Plated
- The safe working load (SWL) is measured at 1400mm load centre
- SWL: 510kg

210

Prong Overall Length: 3940mm



Brisbane: (07) 3558 9700

| Code | Prong Diameter (mm) | Length (mm) | Fork Pocket Size (mm) | Fork Centres (mm) | HCG (mm) | Unit Weight (kg) |
|-------|------------------------|----------------|--------------------------|----------------------|-------------|---------------------|
| V2415 | 70 | 2800 | 190x65 | 345 | 1553 | 163 |
| | | | | | | |

Melbourne: (03) 9115 9100



Forklift Drum Cable Slippers

- These attachments are designed to fit onto the forks of a forklift, allowing the forklift to safely lift and move cable drums without damaging the drums or the forklift.
- Designed to suit spindle up to 50 80mm diameter
- Supplied with 1200 long x 48mm diameter spindle
- Powder coated finish
- Designed and fabricated strictly in accordance
 with relevant Australian Standards
- AS/NZS 1554.1: 2011 Structural Steel Welding (see online for more details)





| Code | Capacity (kg) | Length (mm) | Max. Tine Size (mm) | VCG (mm) | HCG (mm) | Unit Weight (kg) |
|-------|------------------|----------------|------------------------|-------------|-------------|---------------------|
| V2417 | 1000 | 1300 | 100x45 | 48 | 734 | 34 |
| V2418 | 1500 | 1300 | 130x50 | 50 | 684 | 50 |
| V2419 | 2000 | 1300 | 155x55 | 50 | 664 | 62 |
| | | | | | | |

Cable Drum Stirrups

- The V2416 Cable Drum Stirrups is an affordable soution to lift and transport cable drums by forklift.
- Cradle to suit up to
 50mm diameter spindles
- Supplied with a 48mm diameter x 1200mm long spindle

sales@verdex.com.au

- Locking bolt safely secures the drum stirrup in position on forks
- Supplied as a pair
- Enamel paint finish



Please note; Cable Drum isn't supplied with Stirrups



| Code | Working Load | Max. Fork Arm | Fork Pocket | Unit |
|-------|--------------|---------------|-------------|-------------|
| | Limit (kg) | Width (mm) | Size (mm) | Weight (kg) |
| V2416 | 2000 | 130 | 150x45 | 30/pair |

🌐 www.verdex.com.au


VERDEX

211

Fork Spreader with Load Guard The V2476 fork spreader evenly distributes the load over the length of the attachment with a load back guard to help secure high loads. The slip-on attachment is secured to the lift truck by a safety chain. Capacity: 3000kg at 600mm Load Centre Load Guard Height: 560mm • Spreader Spreader Fork Pocket **Fork Pocket** Tine Size Unit Code Width (mm) Depth (mm) Size (mm) Centres (mm) LxWxH (mm) Weight (kg) 3000 1200 160x60 872 1050x100x45 255 V2476

2.5 Tonne Forklift Tine Hook

- Converts forklift into a mobile crane in seconds
- Adjustable mounting position along the length of the fork
- Secured to forks by thumb screw
- Swivel hook includes safety latch •
- Powder coated yellow •

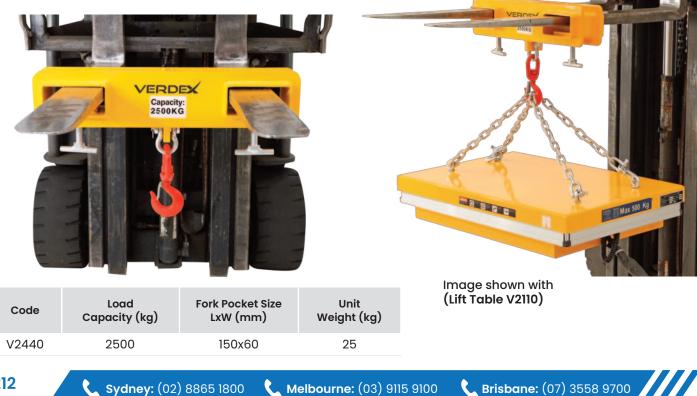



| Code | Safe Working | Load Centre | Jib Size | Fork Pocket | Fork Pocket | Hook Centres | Unit |
|-------|--------------|-------------|----------|-------------|--------------|--------------|-------------|
| | Load (kg) | (mm) | LxW (mm) | Size (mm) | Centres (mm) | (mm) | Weight (kg) |
| V2438 | 3000 | 450 | 900x860 | 185x85 | 500 | 800 | 85 |

Bulk Bag Lifter

- Designed for lifting bulk bags by overhead crane
- Enamel paint finish
- Designed with 4 lifting loops for easy positioning of bulk bag
- Suits 80cm standard bulk bags

VERDEX



| Code | Safe Working Load (kg) | Hook Centre 'A' (mm) | Hook Centre 'B' (mm) | Unit Weight (kg) |
|-------|---------------------------|-------------------------|-------------------------|---------------------|
| V2537 | 2000 | 800 | 1170 | 45 |
| | | | | |



VERDEX


Crane / Forklift Spreader Beam

- Using a Crane, loads can be lifted via the centre single hook point (as a 'Lifting Beam'), or end lifted using a 2 leg Chain Sling (as a 'Spreader Beam').
- If lifting by forklift, the 600mm long slipper pockets allow for fast and safe connection to the truck.
- The Spreader Beam load connection points are adjustable to 3 positions by moving the extendable arms each end.
- Both extendable arms are locked into position via safety pins.
- The unit is supplied standard with a safety swivel hook each end.
- Zinc plated arms with the main body painted in 'safety orange'.



| Rated Capacity When used as | Fully Retracted (LC @ 2405mm) | Middle Position (LC @ 3165mm) | Fully Extended (LC @ 3925 mm) |
|--------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Forklift Attachment | 3500kg | 1500kg | 750kg |
| Lifting Beam | 4500kg | 2500kg | 1300kg |
| Spreader Beam | 9000kg | 7200kg | 5600kg |
| | r /1 :4+ | | Dated |

| Code | F/Lift | Rated | Fork Pocket | Fork | Overall | Unit |
|-------|----------|---------------|-------------|--------------|--------------|-------------|
| | HCG (mm) | Capacity (kg) | Size (mm) | Centres (mm) | Size (mm) | Weight (kg) |
| V2470 | 2405 | 9000 | 190x65 | 900 | 2600x600x410 | 172 |

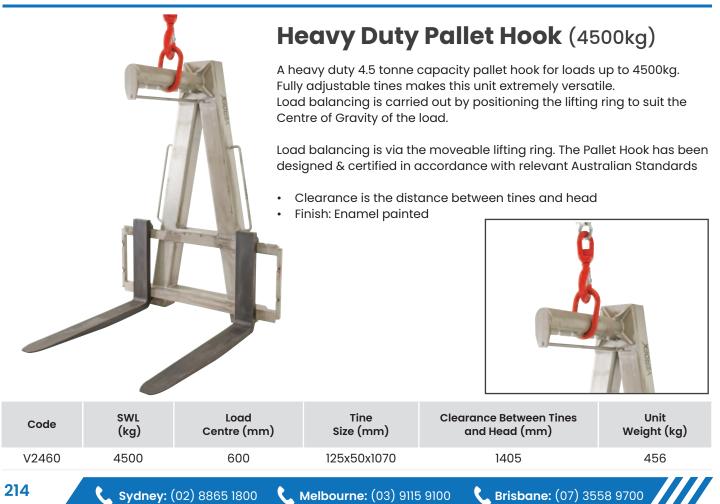




Adjustable Pallet Hook (2200kg)

The V2461 Pallet Hook features variable body height and adjustable tine width, making this versatile attachment ideal for the transport and construction industry.

Load balancing is via the moveable lifting ring. The Pallet Hook has been designed & certified in accordance with relevant Australian Standards

- Adjustable Clearance is the distance between tines and head
- Finish: Zinc plated





| Code | SWL | Load | Tine | Adjustable | Unit |
|-------|------|-------------|-------------|----------------|-------------|
| | (kg) | Centre (mm) | Size (mm) | Clearance (mm) | Weight (kg) |
| V2461 | 2200 | 600 | 100x45x1055 | 1005-1605 | 215 |



VERDEX

215

4.5 Tonne Telescopic Short Jib

- This 4500kg telescopic short fixed jib is designed as an affordable general purpose jib which is great for confined spaces and has a 1.9 metre reach when fully extended.
- Finish: Zinc plated
- 4 jib positions
- Load Centre: 670mm



| SAFE WORKING LOADS (SWL) PER POSITION | | | | | | | | | |
|---------------------------------------|-----|------|------|------|--|--|--|--|--|
| POSITION 1 2 3 4 | | | | | | | | | |
| EXTENSION (mm) | 670 | 1165 | 1545 | 1925 | | | | | |
| SWL (kg) 4500 2900 1300 750 | | | | | | | | | |

| Code | SWL (kg) | HCG (mm) | Jib Length When Closed (mm) | Jib Length When Extended (mm) | Fork Pocket Size (mm) | Fork Pocket Centres (mm) | Unit Weight (kg) |
|-------|-------------|-------------|-----------------------------------|-------------------------------------|-----------------------------|--------------------------------|------------------------|
| V2420 | 4500 | 542 | 1250 | 1900 | 185x65 | 290 | 95 |

4.5 Tonne Telescopic Long Jib

- This 4500kg tonne telescopic jib is a general purpose jib which is great for reaching across pits and areas where the forklift cant drive up to as it has a 3.5 metre reach when fully extended.
- Safe Working Load: 4500kg
- Load Centre: 870mm
- HGC: 836mm
- Finish: Zinc plated
- 6 jib positions
- Overall Dimensions at position 1
 (LxWxH): 2040x490x250mm

| each | | | | |
|-------|--|------|-----|--|
| ion 1 | | VERI | DEX | |

| SAFE WORKING LOADS (SWL) PER POSITION | | | | | | | | | |
|---------------------------------------|------|------|------|------|------|------|--|--|--|
| POSITION 1 2 3 4 5 6 | | | | | | | | | |
| EXTENSION (mm) | 870 | 1945 | 2325 | 2705 | 3085 | 3465 | | | |
| SWL (kg) | 4500 | 1300 | 750 | 560 | 380 | 200 | | | |

| Code | SWL (kg) | Jib Length When Closed (mm) | Jib Length When Extended (mm) | Fork Pocket Size (mm) | Fork Pocket Centres (mm) | Unit Weight (kg) |
|-------|-------------|-----------------------------------|-------------------------------------|--------------------------|-----------------------------|------------------------|
| V2421 | 4500 | 2000 | 3500 | 185x65 | 290 | 140 |
| | | | | | | |

Brisbane: (07) 3558 9700







2.0 Tonne Hook & Tow Jib Attachment

This 2000kg hook & tow jib is suitable for most forklifts and is a simple slip-on attachment with safety chain and swivel hook as pictured.

- Safe Working Load: 2000kg at 1160mm load centre
- Finish: Zinc plated
- Maximum weight on towball can't exceed 500kg
- Hook jib has 2 lifting positions
 Overall Dimensions at position 1: (LxWxH): 1410x420x140mm



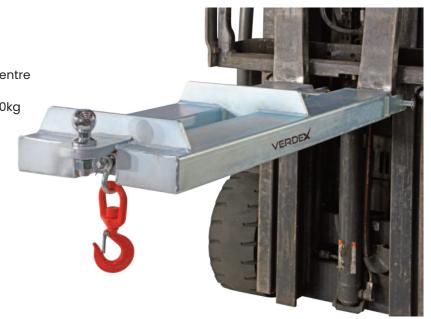

| Code | Details | SWL (kg) | Fork Pocket Size (mm) | Fork Pocket Centres (mm) | Fork Pocket Length (mm) | Unit Weight (kg) |
|-------|-------------------------------------|-------------|--------------------------|-----------------------------|----------------------------|---------------------|
| V2429 | Hook Jib - 2.0 Tonne Capacity | 2000 | 140x65 | 250 | 1220 | 45 |
| V2430 | Hook & Tow Jib - 2.0 Tonne Capacity | 2000 | 140x65 | 250 | 1220 | 45 |

4.5 Tonne Long Tilting Jib

This 4500kg long tilting jib is the most versatile jib in our range and allows for additional height of up to 2.23 metres.

- SWL chart is show in table
- Finish: Zinc plated
- 6 jib positions
- Overall Dimensions when closed (LxWxH): 2100x520x650mm
- HGC: 735mm
- Load Centre: 770mm

| SAFE WORKING LOADS (SWL) PER POSITION | | | | | | | | | |
|---|------------------------------------|--|--|--|--|--|--|--|--|
| POSITION 1 2 3 4 5 6 | | | | | | | | | |
| EXTENSION (mm) 770 2010 2390 2770 3150 3530 | | | | | | | | | |
| SWL (kg) | SWL (kg) 4500 1100 630 470 300 150 | | | | | | | | |

| Code | SWL (kg) | Jib Length When Closed (mm) | Jib Length When Extended (mm) | Fork Pocket Size (mm) | Fork Pocket Centres (mm) | Unit Weight (kg) |
|-------|-------------|-----------------------------------|-------------------------------------|--------------------------|-----------------------------|---------------------|
| V2422 | 4500 | 2100 | 3530 | 185x65 | 322 | 190 |



Deluxe Drum Cradle

- Heavy duty drum cradle with retractable handles for use on 210 litre steel drums
- Great for moving drums around the site • and to lay drums into the side position.
- Durable zinc plated finish
- Single person operation
- Wheel Type: Nylon



| Code | Load | Length | Width | Horizontal | Unit |
|-------|---------------|--------|-------|-------------|-------------|
| | Capacity (kg) | (mm) | (mm) | Height (mm) | Weight (kg) |
| V5000 | 300 | 1000 | 370 | 450 | 14.5 |



- Handle has built in bung remover and seal remover
- Wheel Size: 150x50mm

| (front), 75> • Raises dru | k32mm (rear) m 25mm | | | |
|------------------------------|------------------------|----------------------------|---------------------|---------------------------------|
| Code | Load Capacity (kg) | Overall Size HxDxW (mm) | Unit Weight (kg) | |
| V5045 | 500 | 950x570x750 | 17 | |
| 218 | Sydney: (02) 88 | 65 1800 🔍 Melbo | ourne: (03) 9115 | 9100 🔪 Brisbane: (07) 3558 9700 |

Steel Drum Carrier / Rotator

- Remarkably versatile 210 litre Drum Carrier/Rotator Raises, transports, rotates, tilts and drains fully loaded drums
- Lockable in horizontal or vertical position
- Can be turned end over end to agitate contents
- 2 x 200mm roller bearing castors and 1 x 100mm swivel castor



| Code | Load Capacity (kg) | Length (mm) | Height (mm) | Width (mm) | Clearance under drum while horizontal (mm) | Unit Weight (kg) |
|-------|-----------------------|----------------|----------------|---------------|--|---------------------|
| V5005 | 370 | 1250 | 1180 | 900 | 370 | 42 |

Plastic Drum Carrier / Rotator

| Remarkably versatile 210 litre Carrier/Rotator Raises, trans rotates, tilts and drains fully loaded plastic drums Lockable in horizontal or vertical position Can be turned end over end to agitate contents 200mm roller bearing castor and 100mm swivel castor Powder coated steel | ports, | | |
|--|--------|--|--|
|--|--------|--|--|

| Code | Load Capacity (kg) | Length (mm) | Height (mm) | Width (mm) | Clearance under drum while horizontal (mm) | Unit Weight (kg) |
|-------|-----------------------|----------------|----------------|---------------|--|---------------------|
| V5006 | 370 | 1250 | 1180 | 900 | 370 | 47 |



www.verdex.com.au



Steel & Plastic Drum Trolley

- These drum trolleys are ideal for transporting both steel and plastic drums and are available in solid wheel and pneumatic wheels for rough and uneven ground
- This trolley is also self-standing which means the operator can leave without drums falling over
- Wheels: 400mm front, 75mm castors on the rear



Steel & Plastic Drum Lifter/Palletiser

- This drum trolley suits both steel and plastic 210 litre drums.
- Spring loaded clamp grabs the drum rib with no manual input
- The lifter has a brake to avoid rolling on slopped areas





| Code | Load | Lifting | Length | Height | Width | Unit |
|-------|---------------|-------------|--------|--------|-------|-------------|
| | Capacity (kg) | Height (mm) | (mm) | (mm) | (mm) | Weight (kg) |
| V5030 | 400 | 1070 | 1100 | 1830 | 910 | 100 |

Drum Palletiser Stackers

- These drum palletisers stackers are great for loading and unloading both plastic and steel drums onto pallets
- Can also be used to stack drums on top of another drum or to place on a truck or ute
- V5036 comes with a battery operated weighing scale which gives you an accurate measurement of the drums weight
- Powder coated Steel





| Code | Details | Load Capacity (kg) | Max Lift Height (mm) | Leg Length (mm) | Overall Size LxWxH (mm) | Unit Weight (kg) |
|-------|--|--------------------------|----------------------------|-----------------------|----------------------------|------------------------|
| V5035 | Drum Palletiser Stacker | 450 | 1100 | 500 | 1140x950x1870 | 130 |
| V5036 | Drum Palletiser Stacker (with load scales) | 450 | 1100 | 500 | 1150x950x1870 | 135 |



Hydraulic Drum Truck

- Easily transport steel drums • with this drum truck
- Designed to streamline drum • handling tasks, this drum truck offers unmatched convenience and versatility in industrial environments
- Pallet truck style design •
- Powder coated steel •
- Nylon wheels .



| Code | Load | Min Arm | Max Arm | Radius of Arm | Overall Size | Unit |
|-------|---------------|-------------|-------------|---------------|--------------|-------------|
| | Capacity (kg) | Height (mm) | Height (mm) | (mm) | LxW (mm) | Weight (kg) |
| V5040 | 365 | 270 | 390 | 270 | 1022x722 | 53 |

Drum Dollies

- Drum dollies are suitable for both steel and plastic drums and containers
- Powder coated and stainless steel options •
- Heavy duty easy wheel castors •
- 3 versions available
- Castor Size: 75mm







V5052

| Code | Details | Load Capacity (kg) | Overall Size LxWxH (mm) | Inner Diameter (mm) | Outer Diameter (mm) | Unit Weight (kg) |
|-------|--|--------------------------|-------------------------------|---------------------------|---------------------------|------------------------|
| V5050 | Drum Dollie (Powder coated) | 300 | 710x710x150 | 600 | 710 | 7.5 |
| V5051 | Drum Dollie (Stainless Steel) | 300 | 710x710x150 | 600 | 710 | 7.5 |
| V5052 | Heavy Duty Drum Dollie (Powder coated) | 500 | 630x630x150 | 615 | 630 | 9 |

Sydney: (02) 8865 1800

Melbourne: (03) 9115 9100



| | | | | 8 |
|-------|-----------------------|----------------------------|---------------------|---|
| Code | Details | Overall Size LxWxH (mm) | Unit Weight (kg) | |
| V5053 | 100L Enviro Drum Hook | 390x40x215 | 1.6 | |
| V5054 | 110L Enviro Drum Hook | 490x40x170 | 2 | |



sales@verdex.com.au

•

Hook Drum Lifter

- Suitable for both steel and plastic 210 litre drums
 - Works on any drum that has a rim to grab onto
- Ideal for picking up a drum in the middle of a cluster without having to move any that are in front



Forklift Geared Drum Rotator

- Converts your forklift into a drum handler
- Suitable for 210 litre steel and plastic drums
- Easily attached to most fork trucks
- Able to lift, raise and tilt loaded drums
- Finish: Painted safety yellow
- Drum Size: 570-600mm



| Code | Load | Fork Pocket | Fork Pocket | Unit |
|-------|---------------|-------------|--------------|-------------|
| | Capacity (kg) | Size (mm) | Centres (mm) | Weight (kg) |
| V5065 | 300 | 150x55 | 825 | 60 |

Forklift Drum Rotator

- · Converts your forklift into a drum handler
- Suitable for 210 litre steel drums
- Easily attached to most fork trucks
- Able to lift, raise and tilt loaded drums
- 3 metre pull chain from operators seat
- 30:1 gearing ratio
- Finish: Painted safety yellow





| Code | Load Capacity (kg) | Fork Pocket Size (mm) | Drum Size dia. (mm) | Unit Weight (kg) |
|-------|-----------------------|--------------------------|------------------------|---------------------|
| V5066 | 380 | 180x65 | 570-600 | 97 |
| | | | | |

Melbourne: (03) 9115 9100



Lifting & Handling Equipment

Drum Tipper / Dumper

- Fast and efficient solution to emptying 205 litre steel drums, ideally suited to waste and scrap products
- The drum is secured with the sturdy belly strap & locked in place with the over-centre catch & locking pin
- A rope draw chord is pulled from the driver's seat to ٠ dump the drum where required. A custom locking mechanism is fitted to prevent accidental release while driving over bumpy ground
- Rotational ability 180 degrees •





| Code | Working Load Limit (kg) | Load Centre (mm) | Fork Pocket Size (mm) | Fork Pocket Centres (mm) | Overall Size LxWxH (mm) | Unit Weight (kg) |
|-------|----------------------------|---------------------|--------------------------|-----------------------------|----------------------------|---------------------|
| V5069 | 500 | 1000 | 185x65 | 840 | 1400x1040x600 | 85 |
| | | | | | | |

| Attaches quickly Heavy duty weld Lifts, transports c | | k trucks | | |
|--|---|--------------------------|-----------------------------|---------------------|
| operation o | deo of this in on our website here: <u>x.com.au/V5076</u> | | | VERDEX |
| Code | Load Capacity (kg) | Fork Pocket Size (mm) | Fork Pocket Centres (mm) | Unit Weight (kg) |
| V5076 | 500 | 165x65 | 325 | 78 |



Forklift Drum Grab

- Attaches quickly and easily to most fork trucks •
- Heavy duty welded steel construction
- Lifts, transports and deposits steel drums • without having to leave the drivers seat
- Finish: Painted safety yellow •

| | sales@verdex.com.au | www.verdex.com.au | VEI | | 225 |
|-------|-----------------------|--------------------------|-----------------------------|--------------------|-----|
| V5075 | 680 | 177x58 | 330 | 56 | |
| Code | Load Capacity (kg) | Fork Pocket Size (mm) | Fork Pocket Centres (mm) | Unit Weight (kç | 1) |

(\) www.verdex.com.au



Parrot Beak Drum Lifters

- Suitable for both steel and plastic 210 litre drums
- Simple auto clamp operation, no need to leave the drivers seat
- Allows the operator to remove and place drums on pallets or bunds without having to leave the forklift seat
- Height adjustable for use with different drum shapes
- Available in single and double drum pickups
- Finish: Painted safety yellow





| Code | Details | Load Capacity per beak (kg) | Fork Pocket Size LxWxH (mm) | Fork Pocket Centres (mm) | Unit Weight (kg) |
|-------|----------------------------------|--------------------------------|--------------------------------|-----------------------------|---------------------|
| V5080 | Parrot Beak Drum Lifter (single) | 360 | 750x150x55 | 500 | 45 |
| V5081 | Parrot Beak Drum Lifter (double) | 360 | 750x150x55 | 590 | 62 |

Galvanised Parrot Beak Drum Lifter

• Suitable for both steel and plastic 210 litre drums with a top lip

Watch a video of this in operation on our website here:

www.verdex.com.au/V5080

- Simple auto clamp operation
 no need to leave the drivers seat
- Allows the operator to remove and place drums on pallets or bunds without having to leave the forklift seat
- Finish: Zinc plated
- HCG: 560mm
- VCG: 130mm





| | Code | Load Capacity (kg) | Load Centre (mm) | Fork Pocket Size (mm) | Fork Pocket Centres (mm) | Unit Weight (kg) |
|-----|-------|-----------------------|---------------------|--------------------------|-----------------------------|---------------------|
| | V5085 | 1000 | 1210 | 185x60 | 250 | 72 |
| 226 | | Sydney: (02) 8865 18 | | • (03) 9115 9100 | Brisbane: (07) 35 | 58 9700 |

DELIVERING AUSTRALIA WIDE

Drum Positioner

- Suitable for both steel and plastic 210 litre drums
- Can change drum position from vertical to horizontal & vice-versa
- Hinged tines automatically lock when • lowered to the ground in horizontal position
- Suitable for loading drums onto transport vehicles
- Works great for loading & unloading drums off rack stands
- Can be operated without the driver having to leave the forklift seat

Watch a video of this in

www.verdex.com.au/V5090





| Code | Load | Prong Distance | Fork Pocket | Fork Pocket | Overall Size | Unit |
|-------|---------------|----------------|-------------|--------------|--------------|-------------|
| | Capacity (kg) | Apart (mm) | Size (mm) | Centres (mm) | LxWxH (mm) | Weight (kg) |
| V5090 | 400 | 575 | 150x60 | 420 | 1800x700x660 | 75 |

Fixed Prong Drum Positioner


- Suitable for both steel and plastic 210 litre drums
- Works great for loading and unloading drums off rack stands



| Code | Load | Prong Distance | Fork Pocket | Fork Pocket | Overall Size | Unit |
|-------|---------------|----------------|-------------|--------------|--------------|-------------|
| | Capacity (kg) | Apart (mm) | Size (mm) | Centres (mm) | LxWxH (mm) | Weight (kg) |
| V5091 | 300 | 565 | 140x50 | 560 | 1360x715x120 | 42 |

Forklift Side Operated Drum Rotator (Chain Drive)

- Empties a standard 205 litre • drums with minimal effort
- Suitable for drum rotation up to 3m above ground
- Rotation carried out via hand chain ٠
- Belly strap and eccentric lock secures drum in position
- Locking pin prevents ٠ accidental release
- Slip-on attachment allows quick connection to a forklift
- Can be coupled with the **Plastic Barrel Option**
- Zinc finish
- Rotation: 360°





| Code | Load | Load Centre | Fork Pocket | Fork Pocket | Unit |
|-------|---------------|-------------|-------------|--------------|-------------|
| | Capacity (kg) | (mm) | Size (mm) | Centres (mm) | Weight (kg) |
| V5068 | 400 | 940 | 185x60 | 840 | 90 |



www.verdex.com.au

VERDEX


Side Shift Drum Palletiser

- The Side Shift Drum Palletiser is specially designed for moving drums and barrels from any position on a pallet.
- It uses a sliding side-shift arrangement allowing it to even be used for moving containers and drums placed in the centre of a pallet.
- The palletiser straddles the pallet and only requires access to one side, thus allowing pallets in confined areas to be kept against the wall even when unloading.
- When moving the drum onto another pallet, scales or the floor, the drum can also be moved to either side using the side-shift arrangement
- This unique design side shift drum palletiser can pickup drums from any position on the pallet, skid or bund -straddles beside and over the pallet
- Suitable for both steel and plastic drums
- The operator requires only 12kg of force on the handle to lift a 300kg drum

Watch a video of this in operation on our website here: <u>www.verdex.com.au/V5160</u>





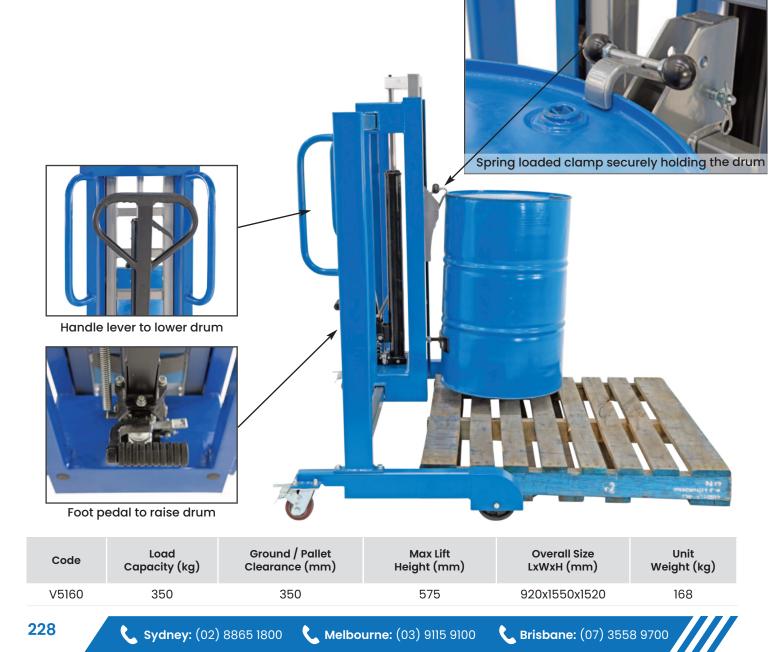



POPULAR FORKLIFT ATTACHMENTS AND LIFTING EQUIPMENT



Cable Drum Stirrups See Page 211



Telescopic Short Jib See Page 216





Forklift Tine Hook See Page 212



Long Tilting Jib See Page 217



Wheelie Bin Tipper See Page 250

VERDEX

Steel & Plastic Drum Lifter & Rotator

- This drum lifter can pickup and rotate drums with ease
- Manual foot or handle hydraulic pump for lifting
- Geared rotation using steering handle
- Worm drive handle for drum tilting



Electric Drum Lifter & Rotator

These electric drum lifters pickup and rotate drums using battery electric power for both up and down and for tilting.

- Suitable for both steel and plastic drums
- Lifting Speed: 120mm per second
- Rotation Speed: 180° 30 seconds
- Battery: 12v, 120Ah



| V5150 450 2300 740 630 1600x950x1920 355 | Code | Load Capacity (kg) | Max Lift Height (mm) | Leg Length (mm) | Distance Between Legs (mm) | Overall Size LxWxH (mm) | Unit Weight (kg) |
|--|-------|--------------------------|----------------------------|-----------------------|-------------------------------|----------------------------|------------------------|
| | V5150 | 450 | 2300 | 740 | 630 | 1600x950x1920 | 355 |

